




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B01L 9/06		(11) International Publication Number: WO 97/18896
A1		(43) International Publication Date: 29 May 1997 (29.05.97)
(21) International Application Number: PCT/FI96/00630 (22) International Filing Date: 21 November 1996 (21.11.96) (30) Priority Data: 955611 22 November 1995 (22.11.95) FI (71) Applicant (for all designated States except US): CLIDS OY [FI/FI]; Savilahdentie 6, FIN-70210 Kuopio (FI). (72) Inventors; and (75) Inventors/Applicants (for US only): IKONEN, Pasi [FI/FI]; Kalevalankatu 13 H 6, FIN-70500 Kuopio (FI). TUONONEN, Reijo [FI/FI]; Kettulanlahdentie 73, FIN- 70400 Kuopio (FI). (74) Agent: PITKÄNEN, Hannu; Pitkänen Oy, Savilahdentie 6 L 3, FIN-70210 Kuopio (FI).		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published With international search report. In English translation (filed in Finnish).

(54) Title: SPECIMEN IDENTIFIER

(57) Abstract

The subject of this invention is a specimen identifier, which consists of a base section (1), which allows the specimen identifier to be placed on a flat surface, an identifier memory unit (2) for identifying the specimen, which fits conveniently into the base section, and a mounting section (3) for mounting the test tube (4) in the specimen identifier. According to the invention, the specimen identifier includes a middle section (5) between the base section (1) and the mounting section (3), and mounting grips (3) forming the mounting section positioned a short distance from the base section (1) which expand to the sides, are curve-shaped and manufactured from a flexible material, and whose arms are a distance apart from each other and between which the test tube can be mounted.

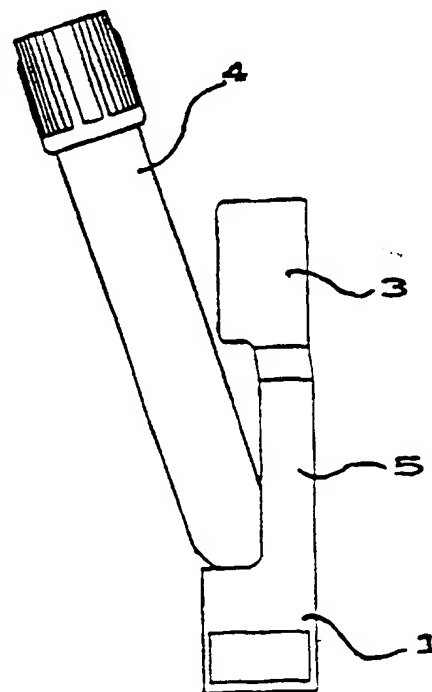

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

SPECIMEN IDENTIFIER

The subject of this invention is a specimen identifier, which consists of a base section, which allows the specimen identifier to be placed on a flat surface, an
5 identifier memory unit for identifying the specimen, which fits conveniently into the base section, and a mounting section for mounting the test tube in the specimen identifier.

At present, it is general practice to place the test tube, or an equivalent vessel
10 containing the specimen, into specific specimen identifiers and then to transfer the specimen identifiers from one appliance to another during the various handling stages of the specimen. Data can then be fed into the memory of the specimen identifier for identification purposes. Typical data would be the personal details or identifier of the specimen owner for identification
15 purposes, the tests performed, or to be performed, on the specimen, etc. There are disadvantages associated with present specimen identifiers. Visibility of the specimen is an important factor, but with present equipment, it is not possible to view the specimen sufficiently clearly since the specimen holder covers the test tube. With present appliances or holders the test tube is
20 mounted by pushing it down from above until the bottom of the test tube touches the base section. Inserting and removing test tubes in this manner is, however, difficult. It is also a problem if the specimen identifier cannot stand up to the operations required by the test programme.

25 The purpose of this invention is to introduce a specimen identifier which eliminates the drawbacks associated with the present specimen identifiers. In particular, the purpose of the invention is to introduce a specimen identifier in which the specimen is clearly visible and in which the specimen identifier, test tube and specimen can be easily handled. In addition, the purpose of the
30 invention is to introduce an enduring specimen identifier in which the test tube, or equivalent, is easily mounted and from which it is easily removed.

The purpose of the invention is achieved with a specimen identifier which possesses the characteristics presented in the appended patent claims.

According to the invention, the specimen identifier includes a middle section between the base section and the mounting section, and mounting grips forming the mounting section positioned a short distance from the base section which expand to the sides, are curve-shaped and manufactured from a flexible material, and whose arms are a distance apart from each other and between
5 which the test tube can be mounted. These mounting grips clamp the test tube, or equivalent vessel, tightly and the tube remains well in position, also supported from below by the base section of the specimen identifier.

10 With this invention, the following advantages are also achieved; the specimen is clearly visible in the specimen identifier throughout the whole of the middle section and between the mounting grips. The specimen identifier can be used over and over again. The specimen identifier accompanies the specimen from the taking of the specimen through to its analysis. The specimen tube remains
15 reliably in the specimen identifier, neither does the specimen identifier damage the specimen tube. The specimen identifier can easily be cleaned and withstands laboratory conditions such as in an autoclave or deep-freezing. The specimen identifier is manufactured economically from a suitable material by a process such as injection molding.

20

The middle section of the invention is advantageously curve-shaped and the length of the curve formed by it is essentially smaller than the curve formed by the mounting section. In this way, the specimen tube can also be placed against the middle section but it does not prevent the mounting and removal of
25 the specimen tube.

The specimen tube is mounted in the specimen identifier by placing the bottom of the tube into the specimen identifier and by pressing the tube between the mounting grips with a levering movement. The bottom of the tube
30 can be placed against the base section because the middle section does not prevent this action. The mounting grips are free to move in opposite directions because they are some distance from the base section neither does the middle section inhibit their movement. Removal is carried out by continuing the levering movement in the same direction. The mounting and removal of the
35 specimen are simply and easily carried out.

In the advantageous additional arrangement of the invention the external diameter of the mounting section is smaller than the external diameter of the base section. When the specimen tube is placed in the mounting section, the mounting section spreads outwards to a certain extent due to the flexibility of the material. When the specimen tube is in position, the external diameter of the mounting section is approximately as wide, or slightly wider than, the external diameter of the base section. The external diameter of the mounting section is such that it permits the placing of the specimen identifier in standard-size stands, appliances or equivalent.

10

In the following, the invention is defined in more detail with reference to the attached illustrations, in which:

Figure 1 shows an arrangement of the specimen identifier, seen from the side, figure 2 shows the mounting of the specimen tube in the specimen identifier, seen from the side,

15

figure 3 shows the specimen tube mounted in the specimen identifier,

figure 4 shows the removal of the specimen tube, seen from the side,

figure 5 shows an adapter for use with a specimen tube, seen from the side.

20 In the arrangements shown in the figures, the specimen identifier consists of a base section 1, a middle section 5, and a mounting section 3. The base section is hollow and an identifier memory unit 2 is placed in this space. The hollow space in the base is closed with a base plate, such that the identifier memory unit remains tightly within the enclosed space. The center of gravity of the specimen identifier is close to the base section and the base section is shaped conveniently flat and, in any case, such that the specimen identifier remains standing also when the specimen tube 4 is mounted into it. The upper surface of the base section 1 is shaped with a cup-shaped indentation.

25

30 The identifier memory unit 2, situated in the base section, contains a memory component and transmitter/receiver. The identifier memory unit is connected permanently to the specimen identifier at the assembly stage. The identifier memory unit contains the required data concerning the patient, the specimen and its handling. The identifier memory unit is such that it can be re-used and

new data can again be entered. A standard identifier memory unit, suitable for the purpose, is generally used as the identifier memory unit.

5 The mounting section has curved, expanding, mounting grips 3 which are made from a suitable flexible material. The grips are a small distance apart from each other. The middle section 5 is between the base section 2 and the mounting section 3, such that the mounting section is at a distance from the base section. The middle section 5 is curved-shaped and the length of the curve formed is essentially smaller than the curve formed by the mounting
10 section.

The external diameter of the mounting section is smaller than the external diameter of the base section. This is achieved by changing the diameter of the casing between the upper and middle section such that there is a beveling at
15 this point. In this way there are no sharp edges and the surface tapers evenly.

The specimen identifier is open from the side such that the specimen is visible throughout its length. The upper section of the specimen identifier around the tube has a partially round, friction and gripping surface.
20

The specimen tube is mounted in the specimen identifier as shown in figures 2-3 such that the bottom of the specimen tube is placed against the base of the specimen identifier and by twisting and levering the specimen tube towards the mounting section, where the mounting grips of the mounting section spread
25 and the specimen tube can be pushed between them. Once the specimen tube is attached, the mounting grips press the specimen tube tightly in place.

Removal is carried out according to figure 4 by continuing the levering movement in the same direction as in mounting. In this way the bottom of the
30 test tube becomes detached first and by continuing to twist, the top part is also separated from between the mounting grips.

The specimen identifier also includes an adapter 6, as shown in figure 5 which is intended for mounting smaller test tubes, such as micro tubes, to the
35 specimen identifier. The adapter contains two recessions 7, 8, intended for

different tube sizes having different size diameters. The recessions are one on top of the other and between them there is a middle section 9. Grooves 10 have been made around one rim of the recession in a vertical direction, through which the specimen tube fitted in them can be seen. The grooves 10 of the adapter have bulging edges 11 with which the adapter can be mounted in the correct position in the specimen identifier such that the grooves are visible.

The invention is not limited to the advantageous arrangements shown but can vary within the framework of the invention concept formed by the patent claims.

15

20

25

30

35

CLAIMS

1. A specimen identifier which consists of a base section (1) on which the specimen identifier can be placed on a flat surface, and an identifier memory unit (2) conveniently placed in the base section, for identifying the specimen, and a mounting section (3) for mounting the test tube (4) to the specimen identifier, c h a r a c t e r i s e d in that the specimen identifier contains a middle section (5) between the base section (1) and the mounting section (3) and that the mounting section consists of mounting grips (3) a distance from the base section (1) which expand sideways, are curve-shaped, and made from a flexible material, whose arms are a distance from each other and between which the test tube can be mounted.
2. The specimen identifier according to the patent claim 1 c h a r a c t e - r i s e d in that the middle section (5) is curve-shaped and the length of the curve formed is essentially smaller than the curve formed by the mounting section.
3. A specimen identifier according to the patent claim 1 or 2 c h a r a c - t e r i s e d in that the external diameter of the mounting section (3) is smaller than the external diameter of the base section (1).
4. A specimen identifier according to the patent claims 1-3 c h a r a c t e - r i s e d in that the upper surface of the base section (1) has a cup-shaped formation for the bottom of the test tube.

1 / 3

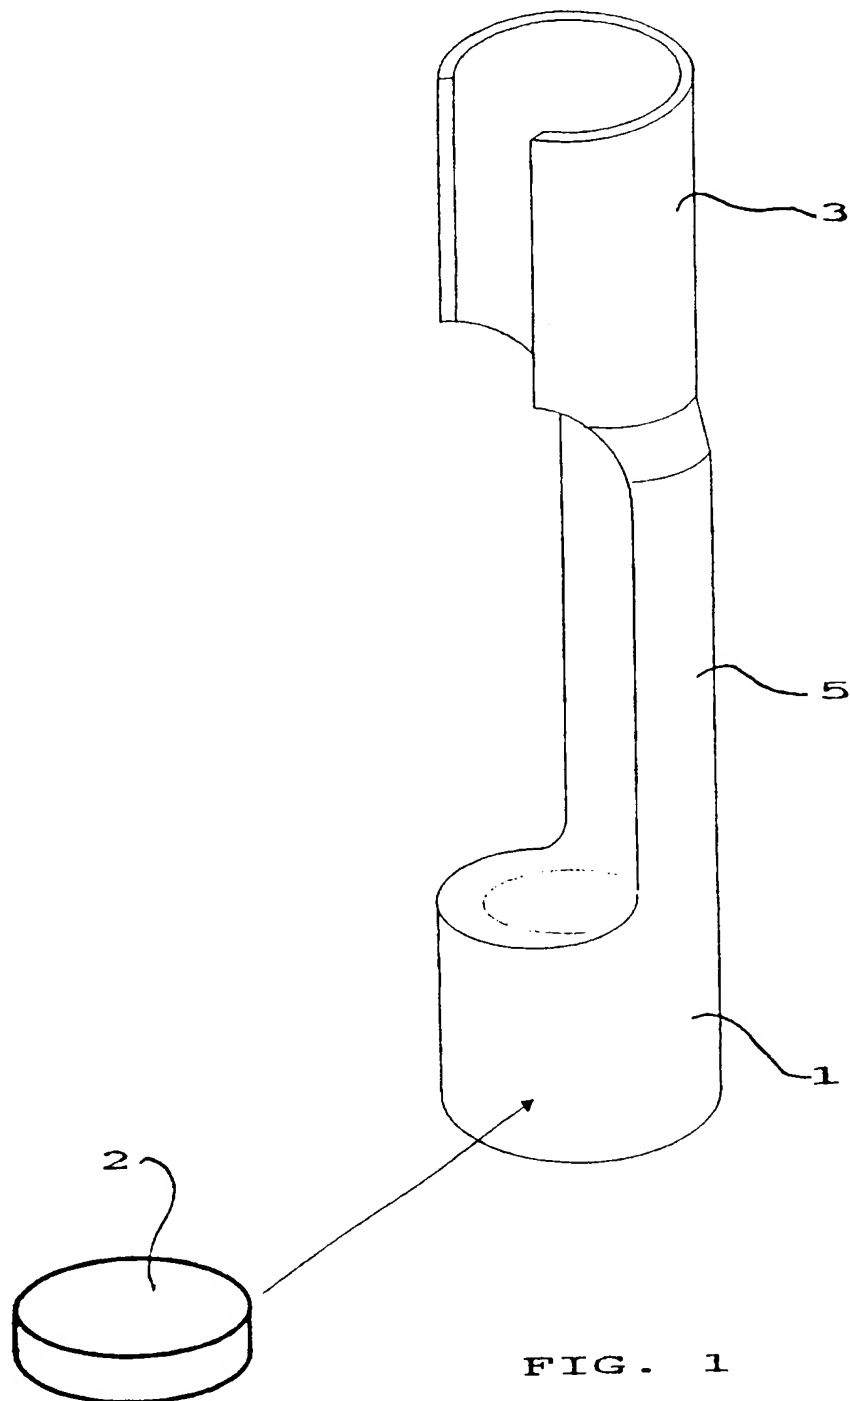


FIG. 1

2 / 3

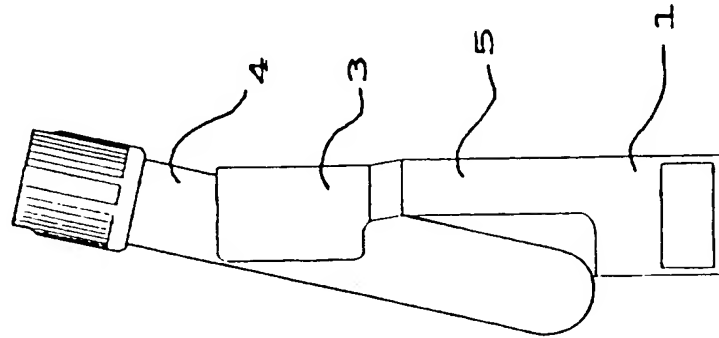


FIG. 4

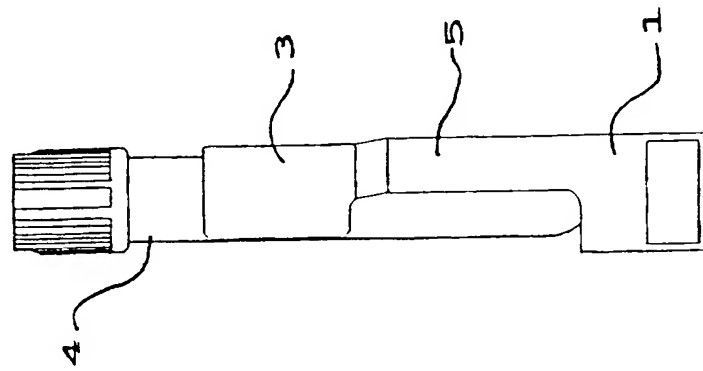


FIG. 3

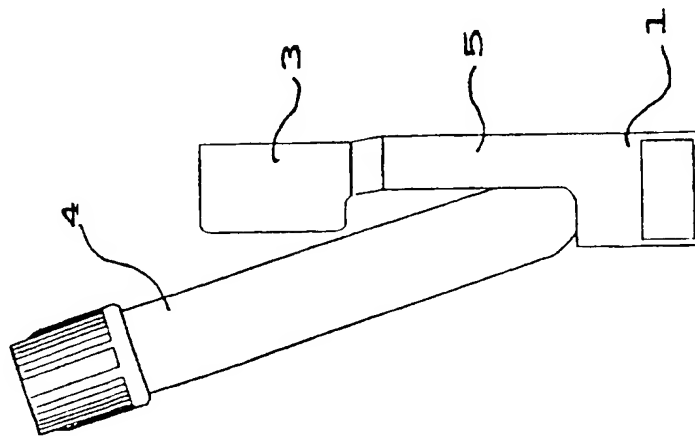


FIG. 2

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 96/00630

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: B01L 9/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: B01L, G01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

DIALOG: WPI, CLAIMS

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	FI 931617 A (PRELAB SYSTEMS OY), 9 October 1994 (09.10.94), figure 1, abstract --	1-4
Y	US 3788450 A (EDGAR TSCHUNT ET AL), 29 January 1974 (29.01.74), figure 2, abstract --	1-4
A	DE 4306563 A1 (LICHTENBERG, JAN ET AL), 8 Sept 1994 (08.09.94), figure 1, abstract -- -----	1-4

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

- * Special categories of cited documents:
- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

24 February 1997

Date of mailing of the international search report

01-03-1997

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

May Hallne
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on patent family members

03/02/97

International application No.

PCT/FI 96/00630

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
FI-A- 931617	09/10/94	NONE	
US-A- 3788450	29/01/74	CH-A- 526444	15/08/72
		DE-A, C- 2056664	25/05/72
		FR-A, B- 2115207	07/07/72
		GB-A- 1346338	06/02/74
		NL-A- 7114649	23/05/72
		SE-B, C- 382305	26/01/76
DE-A1- 4306563	08/09/94	NONE	